


HMS GT WINDOW NET KIT INSTRUCTIONS



This Kit is intended to provide the choice of Welding in the brackets or as a "Bolt in" window net mount. If the brackets are not welded in, It should only be mounted with the supplied Band Clamps, that have been specially designed for this application vs normal "Hose Clamps" Please do not substitute clamps for anything other than is provided unless welding the brackets to the bar

(1) Place **Short Mounting Tab** on rear portion of upper B pillar bar close to the intersection of the main hoop. Attach Short mounting Tab using **2 Mounting band clamps**. One on each side as pictured. * Do not use an impact, only hand tools and do not over tighten or the band clamp will be damaged)

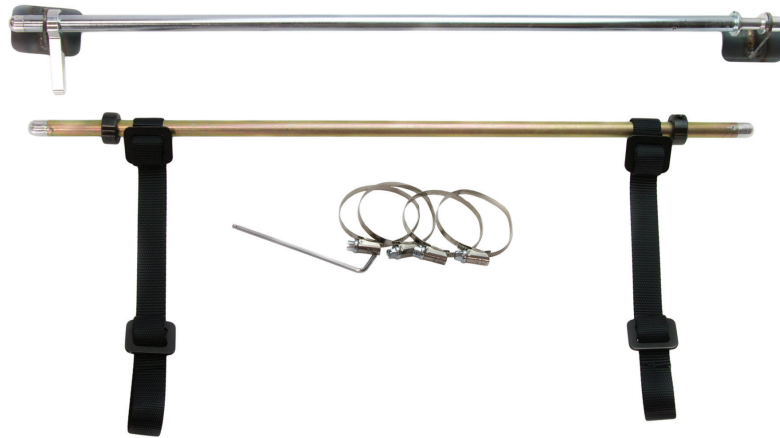


- (2) Place **Long Mounting Tab** towards the front of the upper Bar either before or after the bend depending on the chassis it is going in. Miata's etc. before, Bmw's etc. after the bend. **See picture.**



- (3) Attach **Long Mounting Tab** with 2 Mounting band clamps with tab oriented so that it is pointing towards the side window. See picture.

**NOTE* Depending on the cage design, the front tab ear may need to be bent towards the front of the car to allow proper alignment so the spring bar engages fully. Try to avoid bending the bracket back and forth as this could weaken the bracket.*

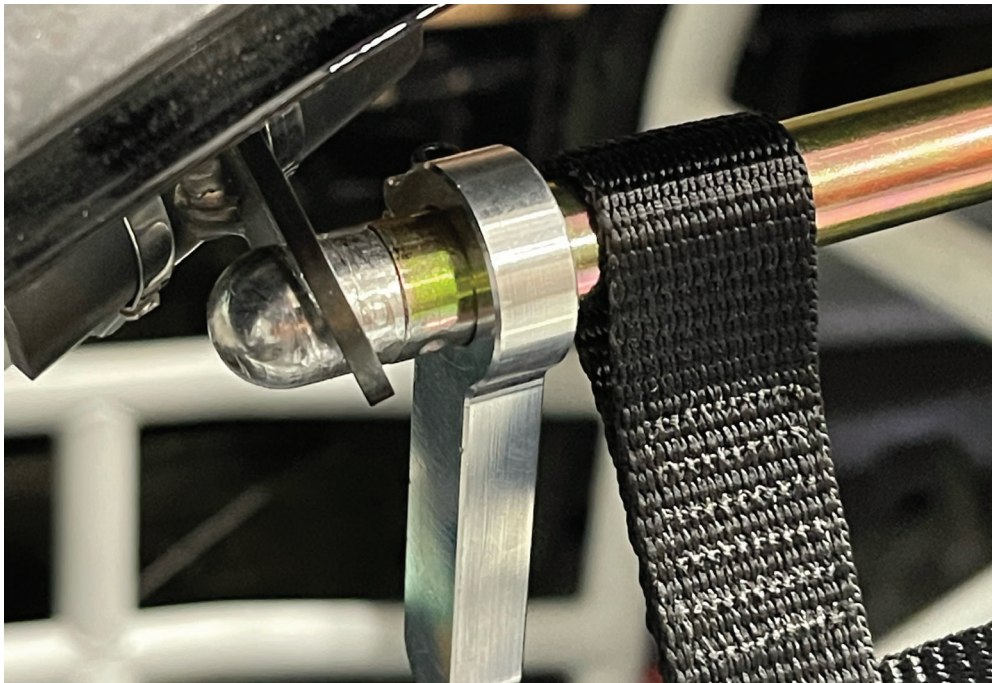

- (4) Insert **Spring Loaded Bar** into net with the spring pin side oriented so it will be rearward.

- (5) Using a flat head screw driver or other pry tool, pry open the **Clamp Handle**, with the #6-32x38 screw removed. While prying, wiggle the handle while simultaneously applying downward pressure to slide the **Clamp Handle** over the silver tip and onto the gold portion of the bar. Once the **Clamp Handle** is on the gold portion, it will freely slide and reinstall the #6-32x38 socket head screw to secure **Clamp Handle**.



- (6) Install **Lower Bar** through lower portion of net and install **Collar Clamps** on either end of Lower Bar to secure net to bar.

- (7) Wrap each one meter **Mounting Strap** using a **3 bar slides** on either side of the **Lower Bar**. Wrap the opposite side of the strap to the door bar using the remaining 3 bar slides. ***Try to reach as low as possible and route the mounting straps on the outside of the door bars to help pull the net closer to the window and help keep tension on the window net.***

